



**ALL-NEW**

## MAXIEM 0707 JetMachining Center

The next generation MAXIEM® 0707 JetMachining® Center sets a new standard for abrasive waterjet machining. Faster, smoother, and more precise, the MAXIEM 0707 is ideal for a wide range of modern machining needs. The exclusive advanced Intelli-TRAX® digital linear encoder provides one-micron resolution instant feedback to the motor control system so the machine knows precisely where the cutting head is at all times. The mobile control station with widescreen display provides flexibility in controller positioning. Optional accessories such as the Rapid Water Level Control for submerged cutting and Collision Sensing Terrain Follower for machining irregular surfaces expand your JetMachining capabilities and dramatically improve production.

### FEATURES

- Fast cutting speeds and high precision that is backed by our exclusive Intelli-MAX® Software with real world cutting data
- Programmable Motorized Z-Axis with a precision OMAX MAXJET®5i Nozzle boosts productivity and process efficiency
- Drive system protected against water, dirt, and grit
- Powerful all-in-one controller computer with large 23" screen
- Highly efficient, industry-proven direct drive pumps available up to 40 hp with operating efficiencies up to 85%
- Free Intelli-VISOR® SE System Monitoring simplifies routine maintenance planning to minimize downtime
- Optional Rapid Water Level Control for quiet submerged cutting
- Optional Bulk Abrasive Feed Assembly transports garnet from the assembly's large hopper into the Zero Downtime Hopper located at the Programmable Motorized Z-Axis
- Optional Variable Speed Solids Removal System (VS-SRS) designed for industrial use increases uptime through automated solids removal
- Factory tested as a complete system before shipping

### BENEFITS

- Machines a wide range of materials and thicknesses, from metals and composites to glass and plastics
- Designed and manufactured at the OMAX factory in Kent, Washington, USA
- Does not create heat-affected zones or mechanical stresses
- No tool changes & minimal fixturing dramatically reduce setup
- Convenient controller storage drawers keep essential tools and spares close by to maintain machine uptime
- Uses substantially less cooling water than inefficient hydraulic intensifier pumps
- Small, efficient footprint for minimal floor space utilization
- Lowest electrical consumption compared to other pump technology
- Leaves behind a satin-smooth edge, reducing secondary operations
- No noxious fumes, liquid or oils used in, or caused by, the machining process
- Environmentally "green" system uses only natural garnet abrasive and water in the cutting process

## MACHINE DIMENSIONS


|                                       |                                      |
|---------------------------------------|--------------------------------------|
| Footprint (without controller)        | 6'7" x 8'3"<br>(2,007 mm x 2,515 mm) |
| Weight (tank empty)                   | 2,400 lb (1,089 kg)                  |
| Height (with whip plumbing)           | 9'0" (2,743 mm)                      |
| Operating Weight (with water in tank) | 5,100 lb (2,313 kg)                  |

## WORK ENVELOPE

|                     |                                    |
|---------------------|------------------------------------|
| X-Y Cutting Travel* | 2'7" x 2'6"<br>(794 mm x 775 mm)   |
| Z-Axis Travel*      | 12" (305 mm)                       |
| Table Size*         | 4'8" x 3'1"<br>(1,435 mm x 953 mm) |

## DRIVE DESCRIPTION

- Brushless servo motors
- Stainless steel hardened precision ground shaft ways
- Real-time closed loop feedback with digital drives
- Bridge-style Y-Axis
- Intelli-TRAX drive technology with precision linear encoders
- Precision Programmable Motorized Z-Axis

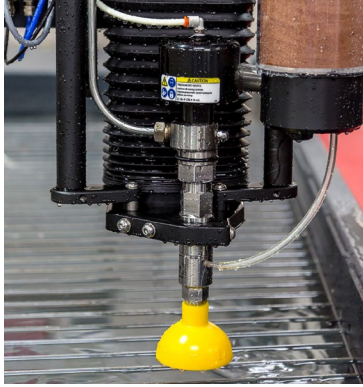

## STANDARD MODEL SPECIFICATIONS

|                                 |  |
|---------------------------------|--|
| Material Support Slats          | 34 4" x 14Ga Galvanized Steel<br>(102 mm x 2 mm) |
| Maximum Supported Material Load | 300 lbs/sq ft<br>(1,465 kg/sq meter)             |
| Electrical Requirements         | 3-Phase, 380-480 VAC ±10%,<br>50-60 Hz           |
| Speed                           | 500 in/min (12,700 mm/min)                       |
| Repeatability                   | ±0.002" (±0.051 mm)                              |

## OPTIONAL ACCESSORIES

- Rapid Water Level Control for submerged cutting
- Intelli-VISOR EX Monitoring Expansion Package
- OMAX Mini MAXJET 5i Nozzle
- 7/15 Mini MAXJET5 Nozzle
- Bulk Abrasive Delivery Assembly
- Collision Sensing Terrain Follower
- Manual Tilt Z-Axis
- Material Holding Kit
- Waterjet Brick Kit
- Extended Slat Package
- High Pressure Universal Plumbing
- Bridge-mounted Pause Button and USB Port
- Additional Seats of Intelli-MAX Software Suite
- Variable Speed Solids Removal System (VS-SRS)
- Water-only MAXJET 5 Nozzle
- Laser Feature Finder
- Z-Axis Pneumatic Drill
- Splash Shield Kit
- Water Resistant Keyboard & Mouse
- Access Control Circuit Interface for safety interlocks
- Catcher Tank Armor Plating
- Laminar Filter
- Air and Water Conditioning Kit
- Water Recycling System

\*Optional accessories may reduce travel. Photos may show optional accessories. For a complete list of accessories, contact an OMAX sales representative. Contact OMAX for detailed utility requirements.

## ABOUT OMAX

OMAX is the global total solutions provider in advanced abrasive waterjet systems. Our intuitive Intelli-MAX Software Suite simplifies programming and reduces setup times, increasing your productivity. OMAX engineers continue to innovate technology for abrasive waterjet machining, from proven 4th generation pump designs to cutting edge drive systems with micron-level accuracy. With the largest abrasive waterjet support network in the world, OMAX continues to shape the future of waterjets.

To see how a MAXIEM JetMachining Center can save you time and money, call or visit our website and request a free part analysis today.

**ABRASIVE WATERJET**  
v.s. OTHER METHODS

[WWW.OMAX.COM/COMPARE](http://WWW.OMAX.COM/COMPARE)

Specifications subject to change without notice.  
600100B © OMAX Corporation April 2014

[WWW.OMAX.COM](http://WWW.OMAX.COM)

Made in the USA

**OMAX CORPORATION**

21409 72nd Avenue South  
Kent, WA 98032

TEL 1-253-872-2300 / 1-800-838-0343

FAX 1-253-872-6190

